

Clean-Pak™ Bag



Technical Data

Nominal Size	# of Pockets	Media Area	Rated Face Velocity (FPM)	Rated Air Flow (CFM)	Initial Resistance (In. W.G.)			
					CP9 MERV 15	CP8 MERV 14	CP6 MERV 12	CP5 MERV 11
24x24x36	10	129	500	2000	0.37	0.29	0.23	0.21
24x24x36	8	105	500	2000	0.35	0.26	0.20	0.18
24x24x36	6	82	500	2000	0.41	0.32	0.24	0.20
24x24x30	10	107	500	2000	0.46	0.38	0.32	0.31
24x24x30	8	88	500	2000	0.44	0.35	0.29	0.28
24x24x30	6	68	500	2000	0.47	0.39	0.34	0.33
24x24x26	10	93	500	2000	0.41	0.39	0.28	0.26
24x24x26	8	76	500	2000	0.42	0.40	0.29	0.27
24x24x26	6	59	500	2000	0.45	0.43	0.31	0.30
24x24x22	10	79	500	2000	0.42	0.33	0.25	0.21
24x24x22	8	64	500	2000	0.44	0.40	0.29	0.27
24x24x22	6	50	500	2000	0.48	0.45	0.34	0.31
24x12x22	4	32	500	1000	0.44	0.40	0.29	0.27
24x12x22	3	25	500	1000	0.48	0.45	0.34	0.31
24x24x18	10	64	500	2000	0.44	0.40	0.29	0.27
24x24x18	8	53	500	2000	0.48	0.45	0.34	0.31
24x24x18	6	41	500	2000	0.55	0.52	0.48	0.39
24x12x18	4	26	500	1000	0.48	0.45	0.34	0.31
24x12x18	3	20	500	1000	0.55	0.52	0.48	0.39
24x24x15	10	54	375	1500	0.60	0.55	0.16	0.16
24x24x15	8	44	375	1500	0.65	0.60	0.18	0.18
24x24x15	6	34	375	1500	0.75	0.60	0.18	0.18
24x12x15	4	22	375	750	0.65	0.60	0.18	0.18
24x12x15	3	17	375	750	0.75	0.60	0.18	0.18
24x24x12	10	43	375	1500	0.65	0.50	0.17	0.17
24x24x12	8	35	375	1500	0.75	0.60	0.18	0.18
24x24x12	6	27	375	1500	0.80	0.65	0.23	0.23

Clean-Pak Standard Header Size Chart



Size Code	Nominal Size (H x W)	Catalog Size	Actual Size (H X W)	# of Pockets
A	24 X 24	Yes	23-3/8 X 23-3/8	06 - 12
B	24 X 12	Yes	23-3/8 X 11-3/8	03 - 05
C	12 X 24	Yes	11-3/8 X 23-3/8	05 - 12
D	24 X 20	Yes	23-3/8 X 19-3/8	05 - 09
E	20 X 24	No	19-3/8 X 23-3/8	05 - 12
F	20 X 20	No	19-3/8 X 19-3/8	04 - 09
G	20 X 16	No	19-3/8 X 15-3/8	03 - 07
H	16 X 20	No	15-3/8 X 19-3/8	04 - 09
J	25 X 16	No	24-3/8 X 15-3/8	06 - 07
K	16 X 25	No	15-3/8 X 24-3/8	05 - 12
L	25 X 20	No	24-3/8 X 19-3/8	07 - 09
M	20 X 25	No	19-3/8 X 24-3/8	05 - 12

Minimum Pocket Depth: 10"

Maximum Pocket Depth: 36"

Notes:

1. Performance data per ASHRAE Standard 52.2-2012, tested at 492 FPM face velocity on 24x24x30, 8 pocket filters.
2. Standard header face dimensions are 5/8" less than nominal size.
3. Standard header thickness is 13/16".
4. Optional C-Header (1-1/8" thickness) and E-Header (1" thickness) available for standard header sizes only.
5. Depth measures from the front of the header to the end of the pocket.
6. Recommended maximum final resistance: 1.5" W.G.
7. Filters classified per UL Standard 900 for Flammability.
8. Custom sizes available. Contact factory for availability and pricing.

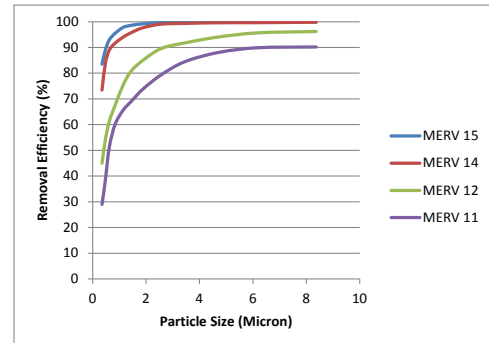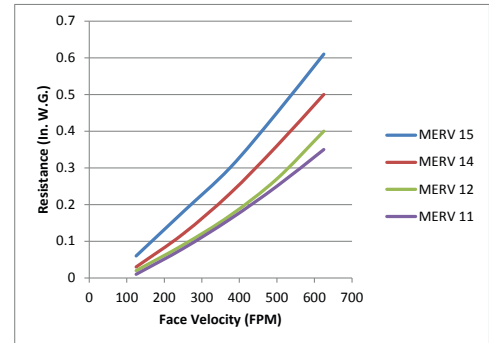

www.clair.com/airguard

A-CLEANPAKTECH-0117



CLARCOR Air Filtration Products
 100 River Ridge Circle • Jeffersonville, IN 47130
 Customer Service: 1-866-247-4827 • Fax: 1-866-601-1809
 Email: mailbag@clarcor.com • www.clair.com/airguard



© 2017 CLARCOR Air Filtration Products
 CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice. Terms and Conditions of Sale can be accessed at www.clair.com.