


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (IN. W.G.)	Media Area (Square Feet)	MERV
LG-904-PH	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2000	0.34	102	15
LG-915-PH	20 X 24 X 12	19-3/8 X 23-3/8 X 11-1/2	1650	0.34	83	15
LG-913-PH	20 X 20 X 12	19-3/8 X 19-3/8 X 11-1/2	1400	0.34	68	15
LG-903-PH	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	1000	0.34	46	15
LG-604-PH	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2000	0.26	102	11
LG-615-PH	20 X 24 X 12	19-3/8 X 23-3/8 X 11-1/2	1650	0.26	83	11
LG-613-PH	20 X 20 X 12	19-3/8 X 19-3/8 X 11-1/2	1400	0.26	68	11
LG-603-PH	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	1000	0.26	46	11

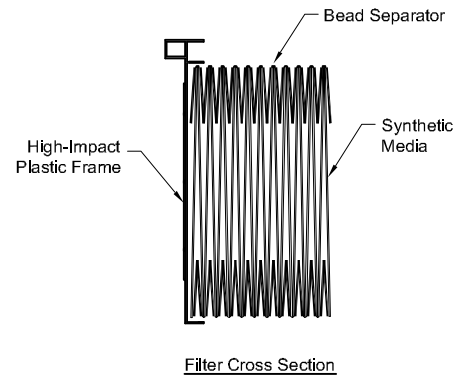

STANDARD CONSTRUCTION

- 100% Synthetic Media
- E-Pleat Technology Pleat Pack Embossed Media with Adhesive Bead Separators
- High-Impact Plastic Frame Panels
- Foamed Hot Melt Sealant
- Reverse Air Flow Option Available
See MKT-B-00542
- Gasket Optional

NOTES

- Testing per ASHRAE 52.2-2007
Tested at 492 FPM on 24x24 Face Size
- Final Resistance: 1.5" W.G.
- Rated Velocity - 500 FPM
- Maximum Operating Temperature: 170 deg. F (76 deg. C)
- Classified per UL Standard 900 for Flammability
- Special Sizes Not Available.

100 River Ridge Circle
Jeffersonville, IN 47130
P: 866-247-4827
F: 866-801-1809
www.clcair.com/airguard

**CONTACT FACTORY TO
VERIFY REVISION LEVEL**

TOLERANCES UNLESS OTHERWISE SPECIFIED	
FRACTIONAL	—
DECIMAL	—
ANGLES	—
ALL DIMENSIONS IN INCHES	

DRAWING NAME LEGACY 12" PH SINGLE HEADER			
APPROVED BY <i>K. Quinn</i>	SPECIFICATION NO. MKT-B-00528	PAGE 1 OF 1	
SCALE NONE	DWG. SIZE A	REVISION G	REVISION DATE 02-10-16
CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLCAIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.			