


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Air Flow @ 500 FPM (CFM)	Initial Resistance @ 500 FPM (In. W.G.)	Air Flow @ 625 FPM (CFM)	Initial Resistance @ 625 FPM (In. W.G.)	Media Area (Square Feet)	MERV
VSGT-403	12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	1000	0.17	1250	0.24	23	8
VSGT-409	16 x 20 x 4	15-3/8 x 19-3/8 x 3-3/4	1120	0.17	1390	0.24	27	8
VSGT-410	16 x 25 x 4	15-3/8 x 24-3/8 x 3-3/4	1400	0.17	1740	0.24	34	8
VSGT-413	20 x 20 x 4	19-3/8 x 19-3/8 x 3-3/4	1400	0.17	1740	0.24	34	8
VSGT-415	20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	1670	0.17	2090	0.24	41	8
VSGT-412	20 x 25 x 4	19-3/8 x 24-3/8 x 3-3/4	1750	0.17	2170	0.24	43	8
VSGT-404	24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	2000	0.17	2500	0.24	49	8

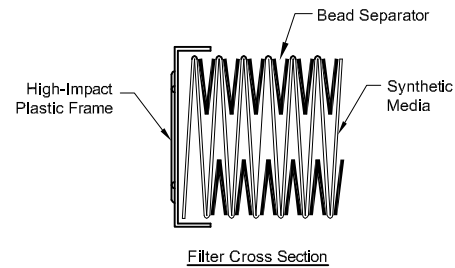

STANDARD CONSTRUCTION

1. 100% Synthetic Media
2. E-Pleat Technology Pleat Pack
Embossed Media with Adhesive Bead Separators
3. High-Impact Plastic Frame Panels
4. Foamed Hot Melt Sealant
5. Gasket Optional

NOTES

1. Testing per ASHRAE 52.2-2012
Tested at 630 FPM on 24x24 Face Size
2. Final Resistance: 1.5" W.G.
3. Rated Velocity - 630 FPM
4. Maximum Operating Temperature: 170 deg. F (76 deg. C)
5. Special Sizes Not Available

100 River Ridge Circle
Jeffersonville, IN 47130
P: 866-247-4827
F: 866-801-1809
www.clcair.com/airguard

**CONTACT FACTORY TO
VERIFY REVISION LEVEL**

**TOLERANCES
UNLESS OTHERWISE SPECIFIED**

FRACTIONAL	-
DECIMAL	-
ANGLES	-

ALL DIMENSIONS IN INCHES

DRAWING NAME VARI-SHIELD			
APPROVED BY <i>K. Quinn</i>	SPECIFICATION NO. MKT-B-00665	PAGE 1 OF 1	
SCALE NONE	DWG. SIZE A	REVISION B	REVISION DATE 10-01-15
CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLCAIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.			