


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (In. W.G.)	Media Area (Square Feet)	MERV
LG4LT-904-NH-QS	24 X 24 X 4	23-3/8 X 23-3/8 X 3-3/4	2000	0.39	57	14
LG4LT-912-NH-QS	20 X 25 X 4 *	19-3/8 X 24-3/8 X 3-3/4 *	1750	0.39	49	14
LG4LT-915-NH-QS	20 X 24 X 4	19-3/8 X 23-3/8 X 3-3/4	1650	0.39	47	14
LG4LT-913-NH-QS	20 X 20 X 4	19-3/8 X 19-3/8 X 3-3/4	1400	0.39	39	14
LG4LT-910-NH-QS	16 X 25 X 4 *	15-3/8 X 24-3/8 X 3-3/4 *	1400	0.39	38	14
LG4LT-909-NH-QS	16 X 20 X 4	15-3/8 X 19-3/8 X 3-3/4	1100	0.39	31	14
LG4LT-903-NH-QS	12 X 24 X 4	11-3/8 X 23-3/8 X 3-3/4	1000	0.39	28	14
LG4LT-922-NH-QS	12 X 12 X 4	11-3/8 X 11-3/8 X 3-3/4	500	0.39	14	14

* Reverse Pleat Direction

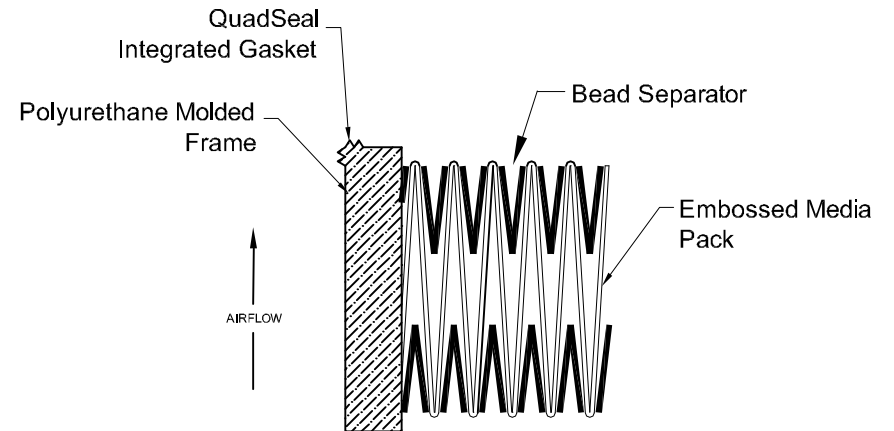

Filter Cross Section

STANDARD CONSTRUCTION

1. LoadTech Blue Embossed, 100% Synthetic Media
2. E-Pleat Technology Pleat Pack
Embossed Media with Adhesive Bead Separators
3. Polyurethane Molded Frame
4. Integrated QuadSEAL Gasket
Air Leaving Side and Perimeter for Front and Side Load Applications

NOTES

1. Testing per ASHRAE 52.2-2012
Tested at 492 FPM on 24x24 Nominal Size
2. Final Resistance: 1.5" W.G.
3. Rated Velocity - 500 FPM
4. Maximum Operating Temperature: 170 deg. F (76 deg. C)
5. Classified per UL Standard 900 for Flammability
6. Special Sizes Not Available



100 River Ridge Circle
Jeffersonville, IN 47130
P: 866-247-4827
F: 866-801-1809
www.clcair.com/airguard

CONTACT FACTORY TO
VERIFY REVISION LEVEL

**TOLERANCES
UNLESS OTHERWISE SPECIFIED**

FRACTIONAL —
DECIMAL —
ANGLES —

ALL DIMENSIONS IN INCHES

DRAWING NAME

LEGACY QUADSEAL

APPROVED BY

K. Quinn

SPECIFICATION NO.

MKT-B-00706

PAGE 1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

NEW

REVISION DATE

04-20-17

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLCAIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.