


| Model Number | Nominal Size (Inches) W x H x D | Actual Size (Inches) W x H x D | Rated Air Flow (CFM) | Initial Resistance (IN W.G.) | | Media Area (Square Feet) |
|--------------|------------------------------------|-----------------------------------|----------------------|------------------------------|--------|--------------------------|
| | | | | 90-95% | 60-65% | |
| VF2-M-4904 | 24 x 24 x 4 | 23-3/8 x 23-3/8 x 3-3/4 | 2000 | .75 | | 110 |
| VF2-M-4915 | 20 x 24 x 4 | 19-3/8 x 23-3/8 x 3-3/4 | 1650 | .75 | | 91 |
| VF2-M-4913 | 20 x 20 x 4 | 19-3/8 x 19-3/8 x 3-3/4 | 1400 | .75 | | 76 |
| VF2-M-4903 | 12 x 24 x 4 | 11-3/8 x 23-3/8 x 3-3/4 | 1000 | .75 | | 53 |
| VF2-M-2904 | 24 x 24 x 2 | 23-3/8 x 23-3/8 x 1-3/4 | 1000 | .50 | | 79 |
| VF2-M-2903 | 12 x 24 x 2 | 11-3/8 x 23-3/8 x 1-3/4 | 500 | .50 | | 38 |
| VF2-M-4604 | 24 x 24 x 4 | 23-3/8 x 23-3/8 x 3-3/4 | 2000 | .55 | | 102 |
| VF2-M-4615 | 20 x 24 x 4 | 19-3/8 x 23-3/8 x 3-3/4 | 1650 | .55 | | 85 |
| VF2-M-4613 | 20 x 20 x 4 | 19-3/8 x 19-3/8 x 3-3/4 | 1400 | .55 | | 70 |
| VF2-M-4603 | 12 x 24 x 4 | 11-3/8 x 23-3/8 x 3-3/4 | 1000 | .55 | | 50 |
| VF2-M-2604 | 24 x 24 x 2 | 23-3/8 x 23-3/8 x 1-3/4 | 1000 | .30 | | 79 |
| VF2-M-2603 | 12 x 24 x 2 | 11-3/8 x 23-3/8 x 1-3/4 | 500 | .30 | | 38 |

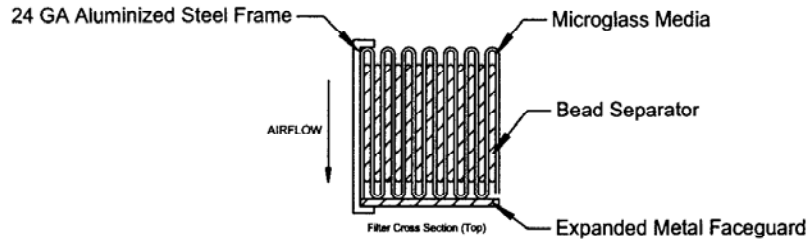

STANDARD CONSTRUCTION

- Media: Micro-Glass Fiber / Acrylic Resin Binder
- Adhesive Bead Separator Mini-Pleat
- 24 Gauge Aluminized Steel Cell Sides
- Expanded Metal Grid on Air Leaving Side

NOTES

- Average Efficiency, MERV (52.2)
90-95% ASHRAE 52.1-1992, MERV 14 ASHRAE 52.2-1999
60-65% ASHRAE 52.1-1992, MERV 11 ASHRAE 52.2-1999
- Final Resistance: 1.5" W.G.
- Rated Velocity 4" Deep - 500 FPM
- Rated Velocity 2" Deep - 250 FPM
- Class 2 Filter Per U.L. Standard 900
- Maximum Operating Temperature: 170 deg. F
- Optional Gasket Available
U - Upstream Gasket (Ex: VF2-M-4904-U)
D - Downstream Gasket
UD- Both Sides
- Reverse Pleat Orientation Available
Add "-R" to Model Number (Ex: VF2-M-4915R)
- Special Sizes Available

AIRGUARD ONE SOURCE FOR AIR FILTRATION PRODUCTS
 P.O. Box 32578
 Louisville, KY 40232
 P: 502-969-2304
 F: 502-961-0930

CONTACT FACTORY TO VERIFY REVISION LEVEL

TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONAL
 DECIMAL
 ANGLES

ALL DIMENSIONS IN INCHES

DRAWING NAME: **VARIFLOW II-M**

APPROVED BY: *R. C. [Signature]* SPECIFICATION NO. MKT-B-00197 PAGE 1 OF 1

SCALE: NONE DWG. SIZE: A REVISION: C REVISION DATE: 01-11-05

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.